


Hole for gas hose to run





Suggested location of the NG with bayonet fitting, extruding 100mm from the back wall.

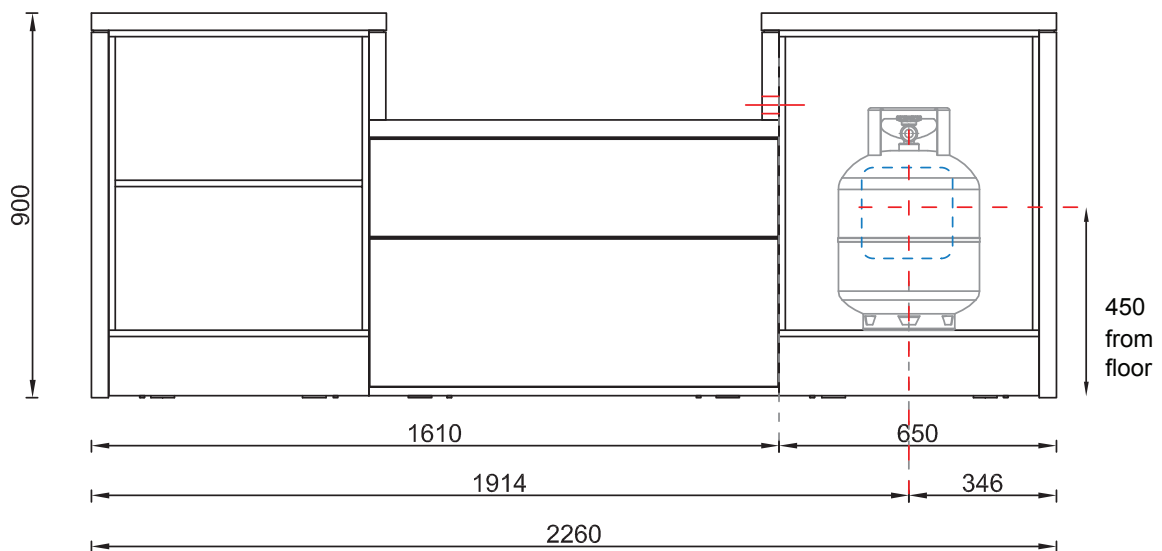



\*All measurement is in mm

**Natural ventilation required to comply as Outdoor Area in accordance with AS/NZS 5601.1:2013**

The outdoor kitchen with BBQ shall only be used in an above ground, open air situation with natural ventilation, without stagnant areas, where gas leakage and products of combustion are rapidly dispersed by wind and natural convection. Any enclosure in which the appliance is used shall comply with one of the following;

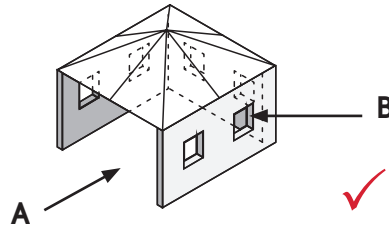

Refer to the Gas Installation standard AS/NZS 5601.1:2013 Appendix I, or your local gas technical regulator, if further clarification is needed.

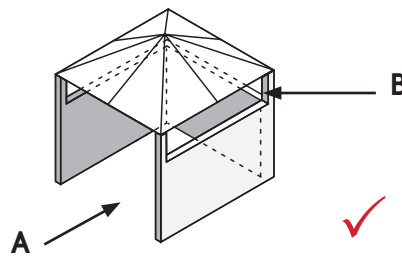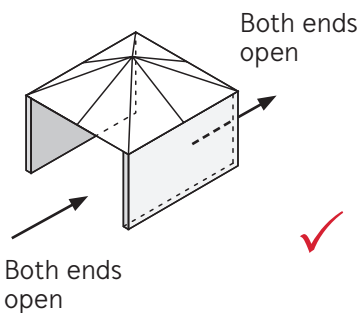

Within a partial enclosure that includes an overhead cover and no more than two walls.

Within a partial enclosure that includes an overhead cover and more than two walls, the following shall apply:

- A. At least 25% of the total wall area is completely open.
- B. And, at least 30% of all remaining wall area is open and unrestricted.